

Technical specifications

Display unit housing specifications

Housing	Clear anodized aluminum
Size	236 x 154 x 86 mm
Weight	Net weight 1,35kg
Protection	IP-50
Temperature	0 to + 55°C,
Humidity	0 to 90% non-condensing

Electrical specifications

Main power supply	18 – 36VDC fused @900mA self recovering
Backup power supply	18 – 36VDC fused @900mA self recovering
Power consumption	< 2,0 A


Declaration of conformity

EN 60945 (IEC 60945: 2002, including corrigendum 1:2008) Chapters 9, 10, 11 and 12

Other


- Standard setup for 99 channels with call functionality.
 - High output power so a good intelligibility is guaranteed.
 - External speaker and microphone connections.
- A network contains 1 or more main stations and 1 or more substations. A call can be done between a main station and a substation or between 2 main stations. There is no call possible between substations.

Dimensions in mm:

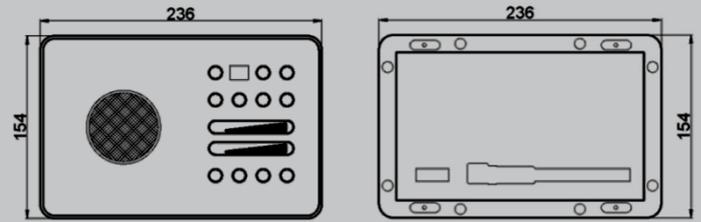


FRONT

BACK



SIDE



BOTTOM

Peripherals



RZ-701: Outdoor speaker



RZ-702: Indoor speaker



RZ-707: Foot switch



RZ-705: Push button IP67



RZ-704: Goose neck microphone

Scope of supply

- The FALCON-700 Manual
- FALCON-700 Intercom main station

Dealer:



Product is subject to change without notice.